



# Tray ST5



Pressurized and Atmospheric Deaerators

**Tray Type Deaerator**  
**Pressurized .005 cc/liter**

COUNTER FLOW TRAY design provides guaranteed removal of all dissolved oxygen in excess of .005 cc/liter from 5% to 100% of deaerator capacity.

[industrialsteam.com](http://industrialsteam.com)

# Tray Type Deaerator Pressurized .005 cc/liter

## When to use

100% Makeup 0% condensate	Yes
30% Makeup 70% condensate	
High Pressure condensate returns	Yes
100% Turndown	
Load Swings	Yes

\*Requires surge tank



## FEATURES

**COUNTER FLOW TRAY** design provides guaranteed removal of all dissolved oxygen in excess of .005 cc/liter from 5% to 100% of deaerator capacity.

### ELECTRONIC INSTRUMENTATION FOR MODULATING LEVEL

control includes a HART compatible differential pressure transmitter, PID controller, and motorized control valve.

**MULTIPLE CONFIGURATIONS:** vertical single tank, standard "tank car" type, or flanged heater section, all providing the same high quality deaeration.

**ONLY STAINLESS STEEL** components come in contact with undeaerated water. Trays and tray box are all stainless steel.

A.S.M.E. Code and National Board stamped receivers at 50 psi is standard. Standard vessel options include stress relieving, non-destructive testing and full vacuum.


### CUSTOM ENGINEERED PACKAGED SYSTEM

includes boiler feedwater pumps and quality components to insure reliable service.

### Testing Requirements

This system requires steady state conditions per the ABMA testing procedure.

# Components and Sizing

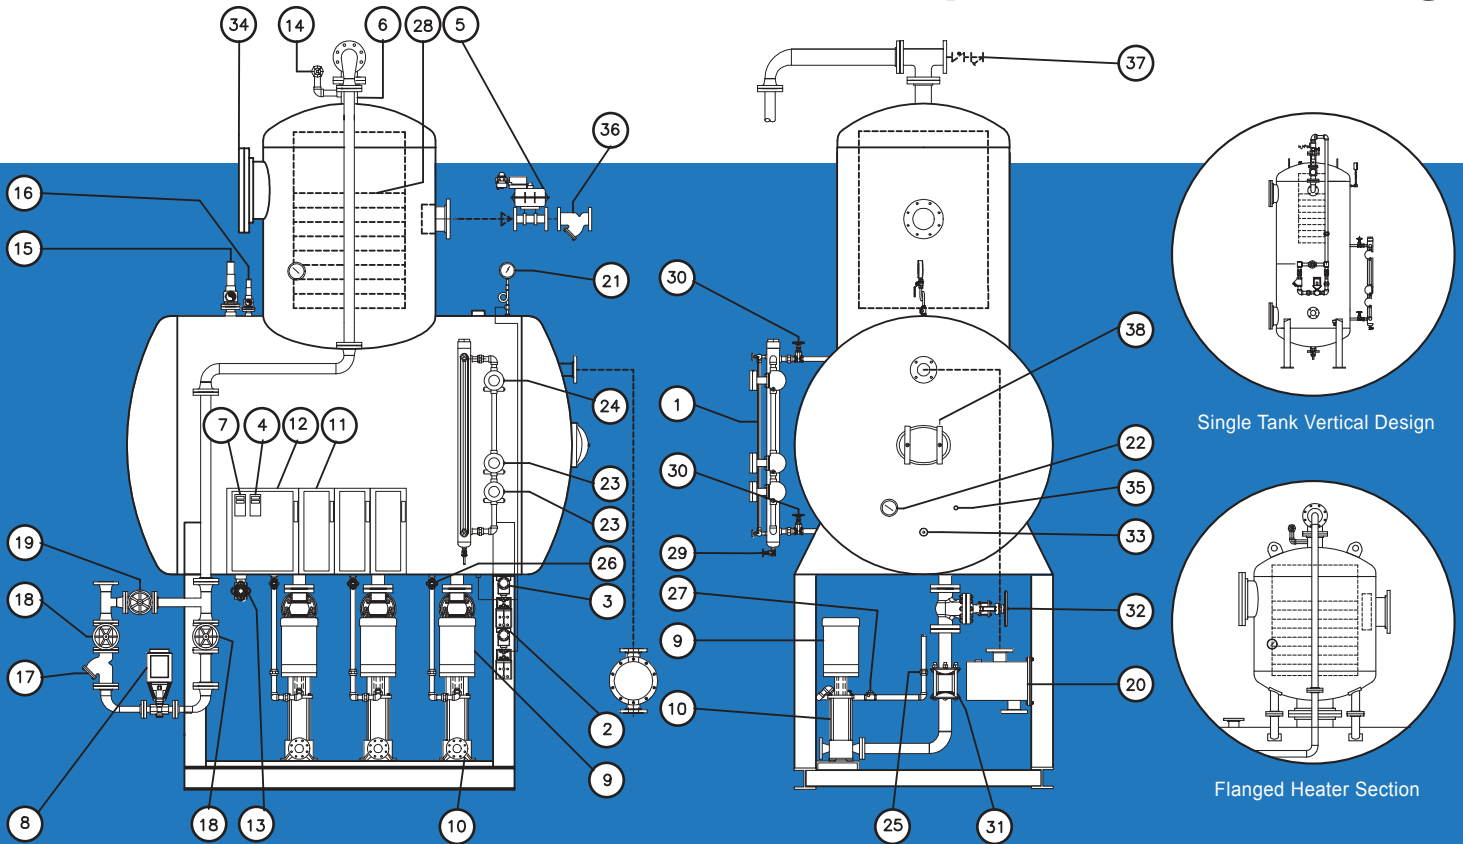

- |  |                          |                                     |                          |
|--|--------------------------|-------------------------------------|--------------------------|
| 1 Sight Glass Assembly                     | 11 Starter               | 21 Pressure Gauge w/cock            | 30 Gate Valve            |
| 2 Pressure Transmitter                     | 12 Control Panel (Nema1) | 22 Thermometer w/thermowell         | (Water Column Isolation) |
| 3 Differential Pressure Transmitter(Level) | 13 Gate Valve (Drain)    | 23 Low Water Alarm & Cut Off Switch | 31 Pump Suction Coupling |
| 4 Pressure Controller                      | 14 Gate Valve (Vent)     | 24 High Water Alarm Switch          | 32 Pumped Return         |
| 5 Pressure Control Valve                   | 15 Safety Relief Valve   | 25 Recirculation Orifice Union      | 33 Magnesium Anode       |
| 6 Make-Up Nozzles                          | 16 Sentinel Relief Valve | 26 Recirculation Gate Valve         | 34 18" Diameter Manway   |
| 7 Make-Up Controller                       | 17 Y-Strainer (Make-Up)  | 27 Recirculation Check Valve        | 35 Chemical Feed Quill   |
| 8 Make-Up Control Valve                    | 18 Gate Valve (Make-Up)  | 28 Stainless Steel Tray Assembly    | 36 Y-Strainer (Steam)    |
| 9 Boiler Feed Pump Motor                   | 19 Globe Valve (Make-Up) | 29 Gate Valve (Water Column Drain)  | 37 Pumped Return         |
| 10 Boiler Feed Pump                        | 20 Overflow Trap         |                                     | 38 12x16 Manway          |

MODEL NUMBER	RATED CAPACITY		RECEIVER SIZE Tank Diameter x Overall Length	HEATER SECTION O.D.	SYSTEM CAPACITY TO OVERFLOW		APPROXIMATE OVERALL DIMENSIONS, in.			APPROXIMATE WEIGHT, lbs.		
	LBS/HR	HP			GALS.	MINS.	HT*	L	W**	SHIPPING	OPERATING	FLOODED
2ST5	6,900	200	42" x 48" v	24"	264	18.9	124	78	50	1,850	4,250	5,850
4ST5	13,600	400	48" x 72" v	24"	585	20.8	152	98	56	3,270	8,150	10,435
6ST5	20,700	600	48" x 96" v	36"	755	17.9	152	122	56	3,875	10,175	12,610
8ST5	27,600	800	48" x 96" v	36"	755	13.4	156	122	56	3,915	10,215	12,650
10ST5	34,500	1000	48" x 96"	42"	755	10.9	156	122	56	3,925	10,225	12,660
12ST5	41,400	1200	60" x 72"	42"	935	11.2	169	104	68	5,130	12,930	17,410
15ST5	51,750	1500	60" x 96"	42"	1,200	11.4	169	128	68	5,845	15,855	20,560
18ST5	62,100	1800	60" x 96"	48"	1,200	9.5	169	128	68	5,885	15,895	20,600
21ST5	72,450	2100	72" x 96"	48"	1,780	12.1	182	132	80	6,995	21,840	28,055
24ST5	82,800	2400	72" x 96"	54"	1,780	10.6	182	132	80	6,995	21,840	28,055
30ST5	100,000	3,000	72" x 120"	60"	2,160	10.3	184	156	80	8,030	26,045	33,550
36ST5	125,000	3,600	84" x 144"	66"	3,515	13.9	198	186	92	11,325	40,640	50,860
45ST5	150,000	4,500	84" x 144"	72"	3,515	11.2	198	186	92	11,420	40,735	50,955
60ST5	200,000	6,000	84" x 192"	72"	4,400	11	222	186	92	12,500	44,100	66,533
75ST5	250,000	7,500	96" x 240"	84"	5,175	10.4	240	280	98	16,600	58,600	78,358
90ST5	300,000	9,000	96" x 288"	84"	6,750	11.3	246	328	108	18,700	60,700	80,458

• Consult Factory for systems over 300,000 lbs./hr.  
 • Weights do not include pumps or optional equipment  
 • Heater sections sized for 100% make-up

\* Includes 48" Stand  
 \*\* Includes Control Panel  
 v - Single tank vertical design

## Additional Industrial Products



Steam Flow  
.005 cc/Liter Pressurized  
Recycling Deaerators



Spray Flow II  
.005 cc/Liter Atmospheric  
Recycling Deaerators



Jet Spray  
.005 cc/Liter Spray Type  
Pressurized Deaerators



Blowdown Heat  
Recovery Systems,  
Blowdown Separators

---

Have questions or need help specifying this equipment? Email: [engineering@industrialsteam.com](mailto:engineering@industrialsteam.com)

Need help with an existing system or parts? Email: [techsupport@industrialsteam.com](mailto:techsupport@industrialsteam.com)

Looking for a local representative? Email: [sales@industrialsteam.com](mailto:sales@industrialsteam.com)

Literature available for download at [industrialsteam.com](http://industrialsteam.com)

---



Pressurized and Atmospheric Deaerators

### Industrial Steam

1403 SW 7th Street, Atlantic, Iowa 50022  
TEL (712) 243-5300 FAX (712) 243-3440

[industrialsteam.com](http://industrialsteam.com)